

PowerWalker ATS

Automatic Transfer Switch

Dual power supply for redundancy

Powered by two separately independent power sources

1x IEC 19 (16A) and 8x IEC C13 (10A) outlets

19" Rack design

Supports all UPS up to 3000 VA



Item-No. 10120543

Product Features

PowerWalker ATS (Automatic Transfer Switch) also known as STS (Static Transfer Switch) is designed with two independent power inlets to supply power to the load from primary power source. Should primary power source fail, the secondary will automatically backup the connected equipment without any interruption. The transfer time from one to another is seamless to the connected equipment. After switching to a secondary power source, the ATS can also switch power back to the primary input when power to the primary input is restored.



USB and RS-232 ports




Intelligent slot

Supports all VFD, VI and VFI models up to 3000VA.

- Provides seamless power switch for IT equipment
- Preferred source selection on front panel



1x IEC C19 (16A) outlets
8x IEC C13 (10A) outlets

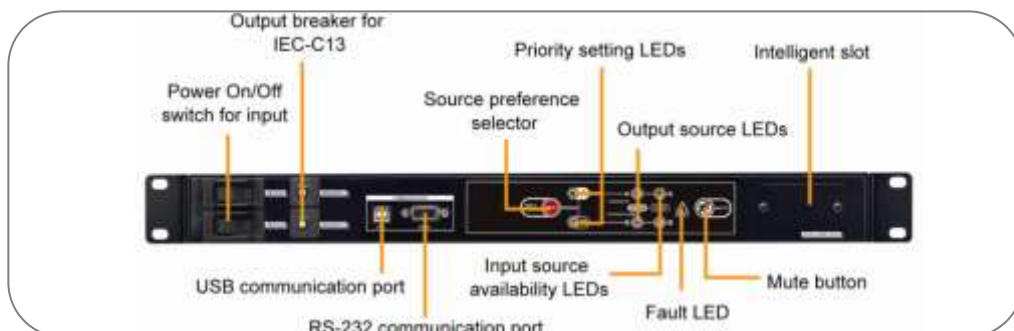

Contact ports

Technical Details

Product Features

| | |
|-----------------------|-------------------------------|
| Maximum Input Current | 16A |
| Voltage Rating | 220/230/240VAC |
| Voltage Range | 180 - 258 VAC |
| Frequency Rating | 50 Hz / 60 Hz |
| Transfer Time | 9-12ms (Typical), 16ms (max.) |

LED Indicators

| | |
|--------------------------|------|
| Priority Setting LEDs | A, B |
| Power Source Status LEDs | A, B |
| Output Source LEDs | A, B |
| Fault | Red |

Connections

| | |
|----------------|---------------------------------------|
| Input from UPS | 2x IEC C20 |
| Output | 1x IEC C19 (16A) and 8x IEC C13 (10A) |
| Communication | USB/RS-232 |

Product Details

| | |
|------------|-------------------|
| Dimensions | 438 x 330 x 44 mm |
| Colour | Black |
| Weight | 5kg |
| Model Code | ATS |

Environment

| | |
|-------------|--------------------------------|
| Temperature | -5°C – 45°C |
| Humidity | 20% - 95% RH (non- condensing) |

Package Content

| | |
|-----------------|-------------------------|
| Package Content | PowerWalker ATS, manual |
|-----------------|-------------------------|

Optional Accessoires

| | |
|-------------------|-------------------|
| IEC cable C13/C20 | Item-No. 91010041 |
| IEC cable C14/C19 | Item-No. 91010040 |
| IEC cable C13/C14 | Item-No. 91010013 |
| IEC cable C19/C20 | Item-No. 91010028 |

Logistic Data

| | |
|-------------------|--------------------|
| Giftbox Language | EN |
| Manual Language | EN |
| Dimension/Giftbox | 582 x 393 x 126 mm |
| Weight/Giftbox | 8.0kg |
| Dimension/carton | 600 x 398 x 420 mm |
| Weight/carton | 20kg |
| Pieces/carton | 3 |
| cartons/layer | 5 |
| Pieces/palette | 75 |
| Item Number | 10120543 |
| EAN-Code | 4260074974959 |
| Warranty | 24 Months |

Available accessories



Version: EN 11/11/2015

We reserve the right for technical changes and mistakes